



TILEWARE
PRODUCTS

**FASTENER SYSTEM ONLY WORKS WITH WOOD BLOCKING
(DO NOT USE WALL ANCHORS WITH THIS SYSTEM)**

**For 1/2" GW
Materials Only**

Promessa™ Series Rectangular Soap Basket Installation Procedures (Gypsum Wallboard/Drywall Surfaces)

Revised: 8/21/17

Model G100-001 Rectangular Soap Basket

G100-001-PC




G100-001-BN



G100-001-ORB



STEP 1 Insert Blocking

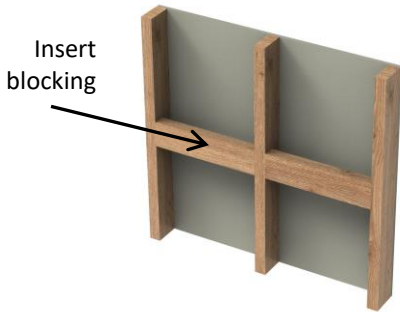


- Insert no less than 2"x 4" wood blocking or locate in vertical stud.



**Warning: FASTENER
SYSTEM ONLY WORKS
WITH WOOD BLOCKING**

**(DO NOT USE WALL
ANCHORS WITH THIS
SYSTEM)**

STEP 2 Locate Wood Blocking

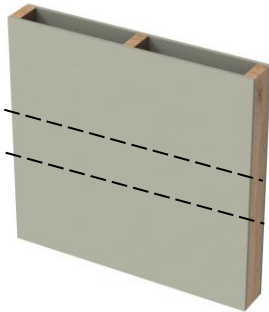


STEP 4 Drill 3/8" Holes

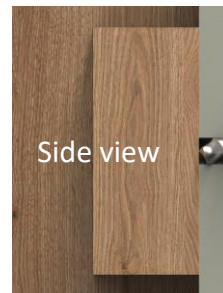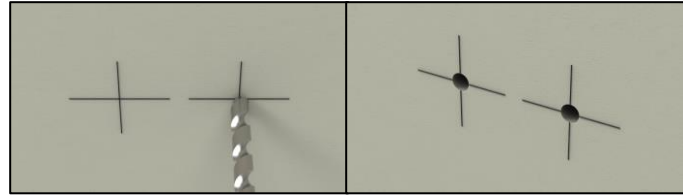


**Warning: Do not
drill deeper than
the thickness of
gypsum wallboard
(drywall) material.**

- Drill a 3/8" hole (right and left sides) in gypsum wallboard (drywall) to accommodate spacer in step 5. Place some tape on the drill to mark drill depth. (Example: If wallboard material is 1/2" thickness, only drill that depth. Do not drill into wood blocking). See 'Side view' diagram above.

STEP 3 Create Level Lines

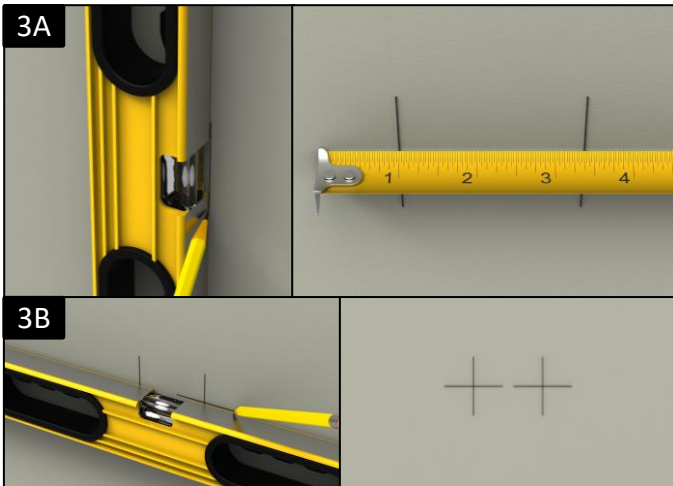


STEP 5 Insert Spacers

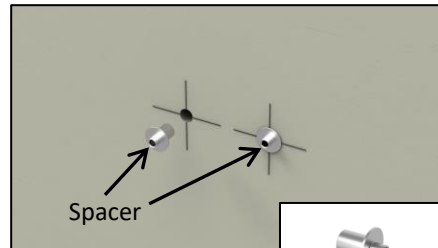

- Insert both left and right spacers into drilled holes. Press in firmly so that flange mounts flush with gypsum wallboard (drywall) material.

- After inserting spacers, use a tape measure (as illustrated) to ensure center to center is 2 3/8" as described in 3A.

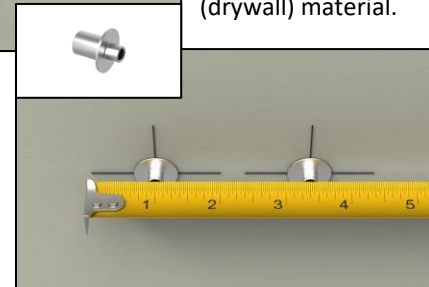

- As illustrated in 3A - Use a level to determine position of right spacer and mark a vertical line. Measure precisely 2 3/8" from this line to locate the position of left spacer.
- As illustrated in 3B - Repeat the process above horizontally.

Technical Fact:

Spacer prevents gypsum wallboard (drywall) from collapsing at drilled hole. Additionally, protects from over-tightening screw which can draw the accessory into the gypsum wallboard (drywall) material.



TILEWARE
PRODUCTS

**FASTENER SYSTEM ONLY WORKS WITH WOOD BLOCKING
(DO NOT USE WALL ANCHORS WITH THIS SYSTEM)**


**For 1/2" GW
Materials Only**

Promessa™ Series Rectangular Soap Basket

Revised: 8/21/17


Installation Procedures (Gypsum Wallboard/Drywall Surfaces)

STEP 6 Install Ferrules

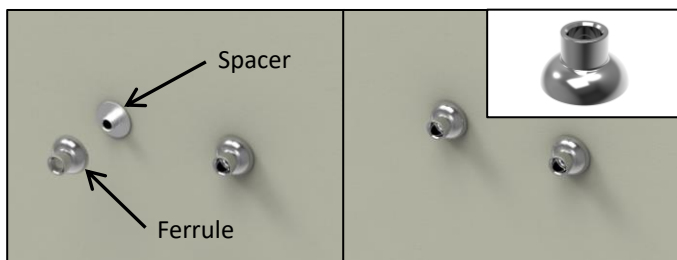

- Simply slip ferrules over spacers.

STEP 7 Mount Basket With Screws

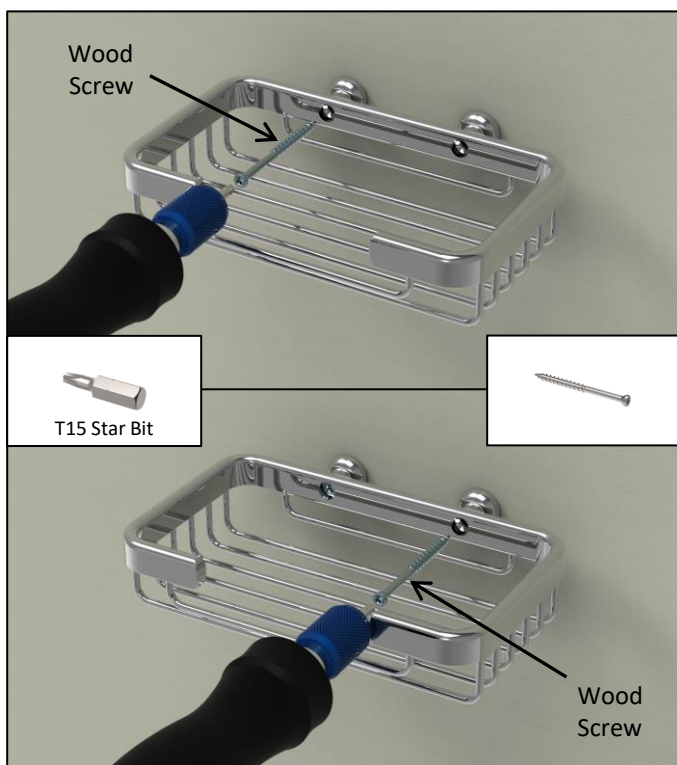


- Mount basket with stainless steel wood screws, both left and right sides, with provided star drive bit in kit (or any T15 star drive bit) using a multi-bit screwdriver or power drill.

Soap Basket Parts List


Basket quantity 1 per kit	Spacer quantity 2 per kit	Standard Ferrule quantity 2 per kit	Decorative Plug quantity 2 per kit	Wood Screw quantity 2 per kit	Star Drive Bit-T15 quantity 1 per kit
255976	C200-044	255245	243168	C200-048	C200-049

STEP 8 Install Decorative Plugs

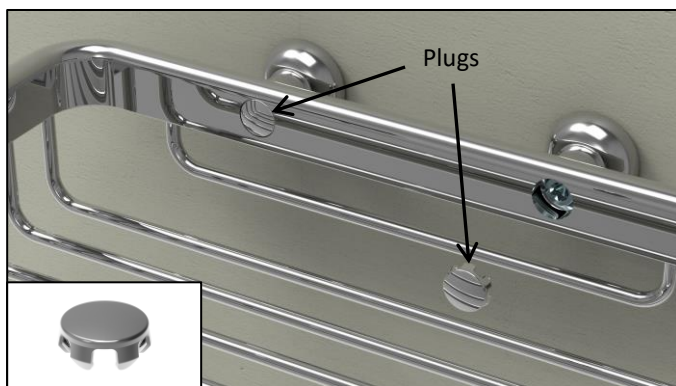

- Install decorative plugs. Easier if all prongs enter hole then press firmly.

STEP 9 Installation Complete

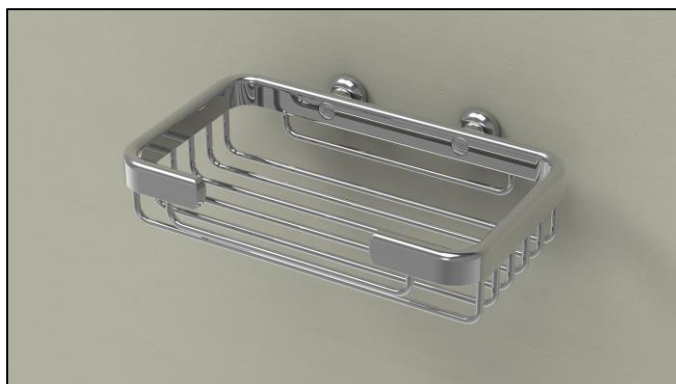

***Thank you for using our
products!***

TileWare Products

PO Box 793, Hickory, NC 28603

Technical Support: 828-322-9273

Email: info@tilewareproducts.com

www.tilewareproducts.com